BioThane® product number chart

All BioThane® Rolled Goods are labeled with a product sticker.

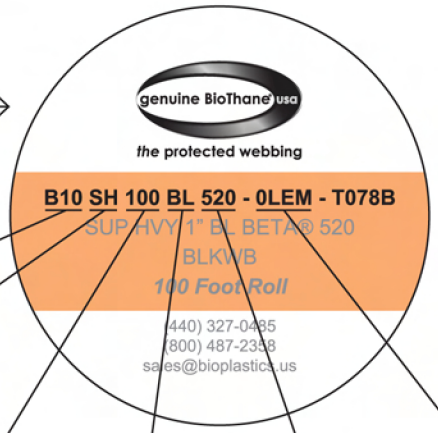

WEBBING	PROFILE	WIDTH	COLOR	COATING	EMBOSS
B10 1000 pound break strength	**SH** super heavy .150"	**100** 1 inch	**BL** black	**520** Beta®	**0LEM** leather emboss

POSSIBLE OPTIONS

WEBBING

B05
400 pound break strength
PER INCH OF WIDTH

* **B10**
1000 pound break strength
PER INCH OF WIDTH

B30
3000 pound break strength
PER INCH OF WIDTH

PROFILE

UT ultra thin .035"
SF super flex .060"
HF high flex .080"
ST standard .100"
G2 grooved .100"
SB beaded .160"
X2 extra thick 2 grooved .130"
* **SH** super heavy .150"
S2 super heavy 2 grooved .150"
TK super thick .185"
T2 super thick 2 grooved .185"
QT quarter thick .250"
QT super grip .250"
CR coated rope *call for details*

WIDTH

038 3/8 inch
012 1/2 inch
058 5/8 inch
034 3/4 inch
078 7/8 inch
* **100** 1 inch
118 1 1/8 inch
114 1 1/4 inch
112 1 1/2 inch
134 1 3/4 inch
200 2 inch
212 2 1/2 inch
300 3 inch
400 4 inch

COLOR

* **BL** black
BR brown
BU blue
GN green
GY grey
OR orange
PK pink
RD red
SI silver
TN tan
TU turquoise
VI violet
WH white
WN wine
YE yellow

COATING

100's Gold opaque
300's Gold translucent
230's Granite®
280's Granite®
400's Diamond®
431's Griamond®
480's Griamond®
* **520's** Beta®
560's Beta®
951 Foam
961 Foam

EMBOSS

0050 50' roll no emboss
0100 100' roll no emboss
0200 200' roll no emboss
0SEM sand emboss
* **0LEM** leather emboss

made with genuine BioThane® usa

* OPTIONS USED IN EXAMPLE AT TOP OF PAGE